


Sound Absorbing Properties: Silence



Test Configuration	NRC
1.6" polyester acoustic absorbing material with 0.4" air gap between textile and absorber	0.90

Silence

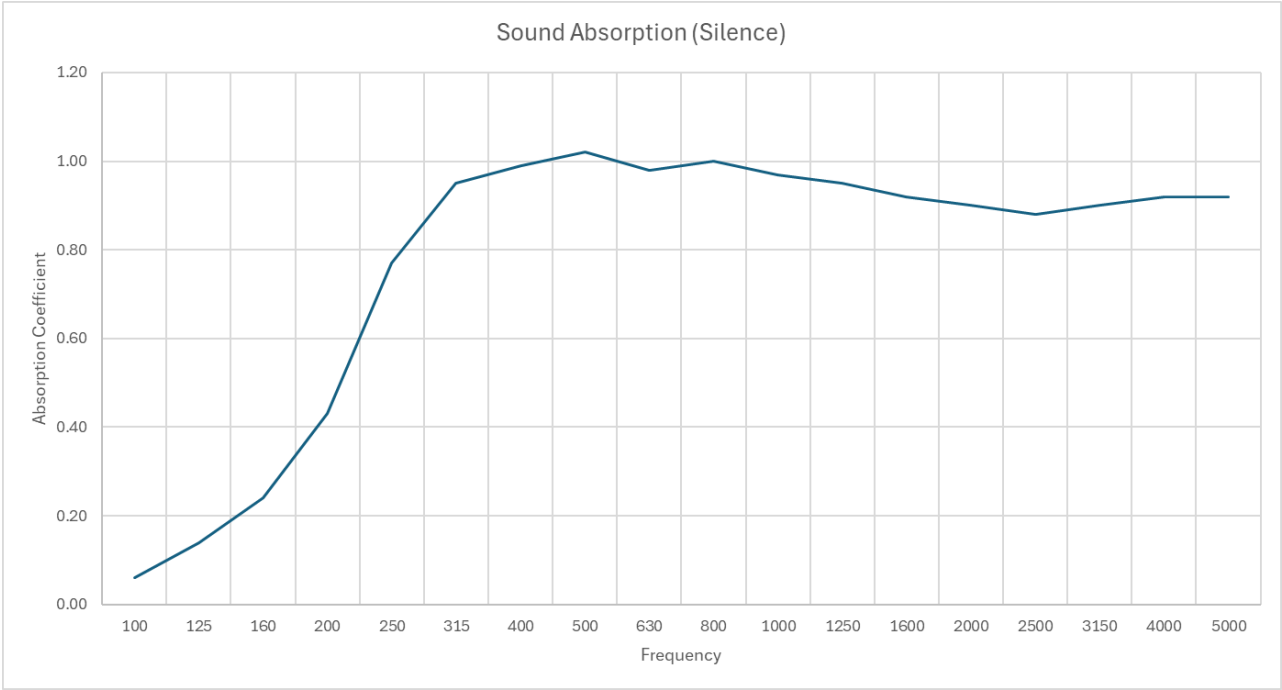


Color	White
Material	100% Knitted Polyester (Recyclable)
Widths (inches)	126 & 177
NRC Rating	0.90
Fire Rating	ASTM E84 Class A
Printing Options	Not applicable
Cutting Methods	Cold, Ultrasonic, Heat

Order Code: FCBC-SIL-xxx (xxx = width)

FABRICoustic by COOLEDGE™

Sound Absorbing Properties: Whisper

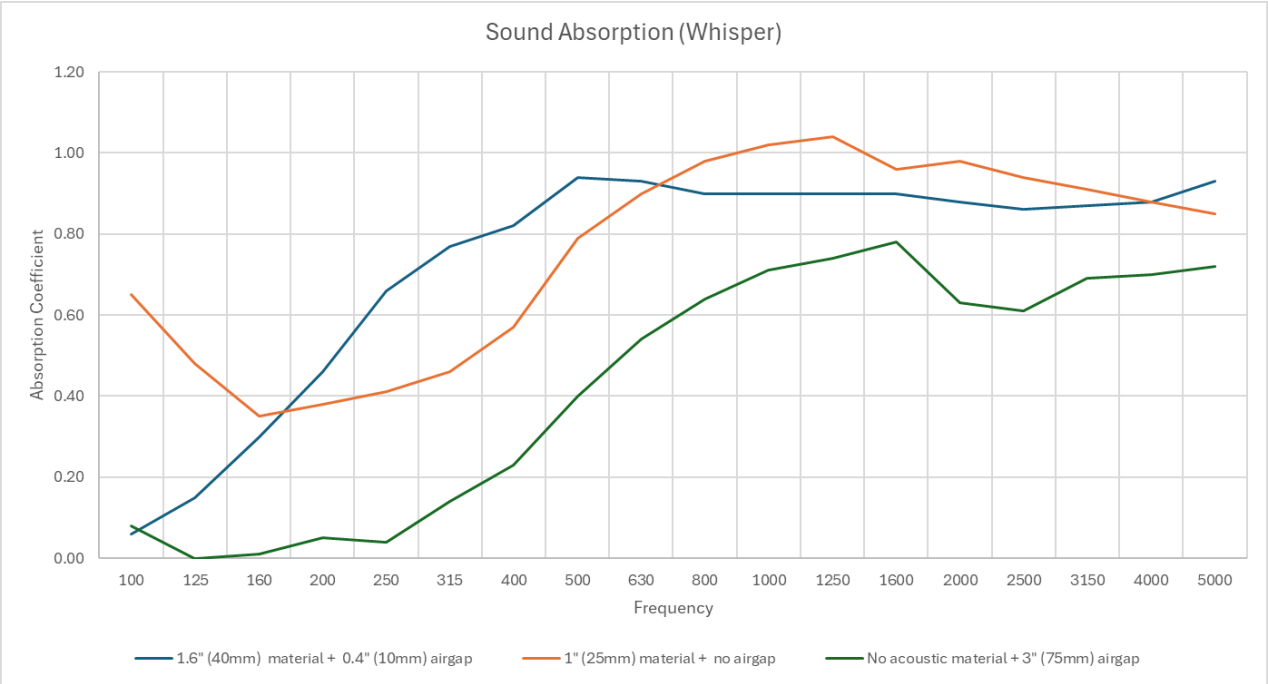

Test Configuration	NRC
1.6" polyester acoustic absorbing material with 0.4" air gap between textile and absorber	0.85
1" polyester acoustic absorbing material mounted on drywall+ plywood backer with no air gap between textile and absorber	0.80
No absorbing material. Textile mounted 3" from wood backing (airgap = 3")	0.45


Whisper



Color	White or Printed
Material	100% Knitted Trevira CS (Recyclable)
Widths (inches)	126, 165, & 205
NRC Rating	0.85
Fire Rating	ASTM E84 Class A
Printing Options	UV
Cutting Methods	Cold, Ultrasonic, Heat

Order Code: FCBC-WHS-xxx (xxx = width)

Sound Absorbing Properties: Serenity

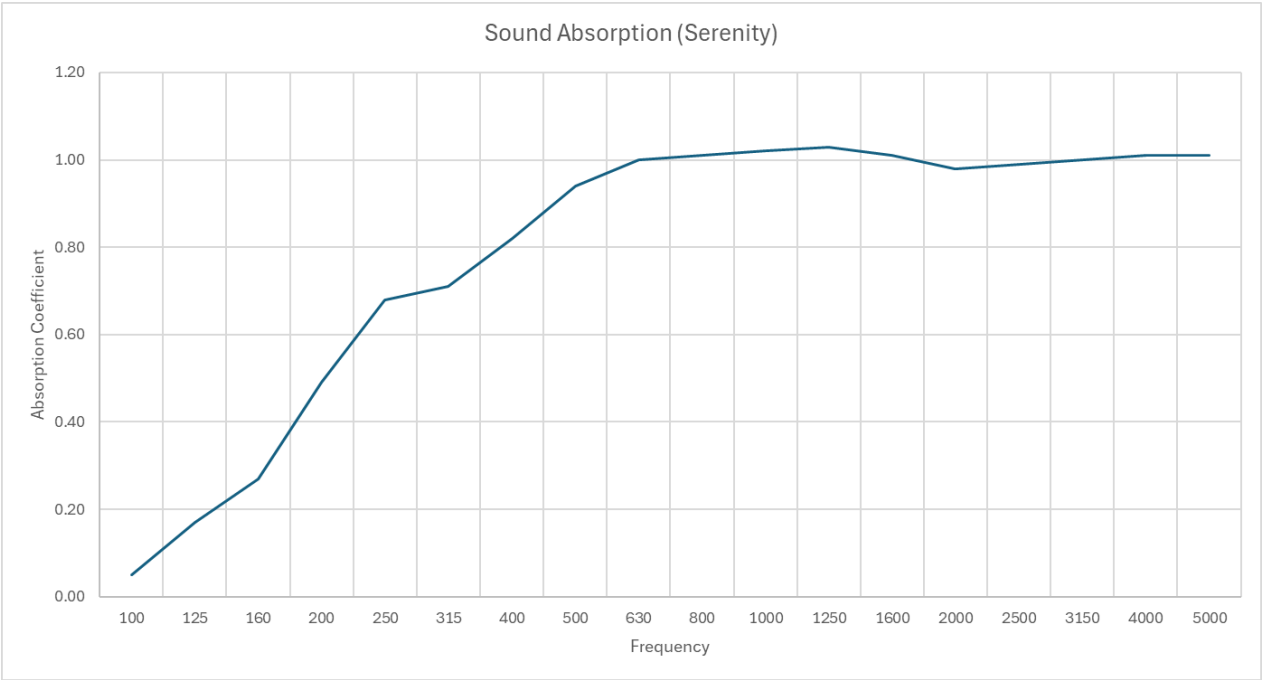

Test Configuration	NRC
1.6" polyester acoustic absorbing material with 0.4" air gap between textile and absorber	0.90

Serenity




Color	White, Colors (11), or Printed
Material	100% Woven Polyester (Recyclable)
Widths (inches)	61 & 122
NRC Rating	0.90
Fire Rating	ASTM E84 Class A
Printing Options	UV, Latex, Dyesub
Cutting Methods	Ultrasonic, Heat

Order Code

FCBC-SRN-xxx (xxx = width)

Sound Absorbing Properties: Calm

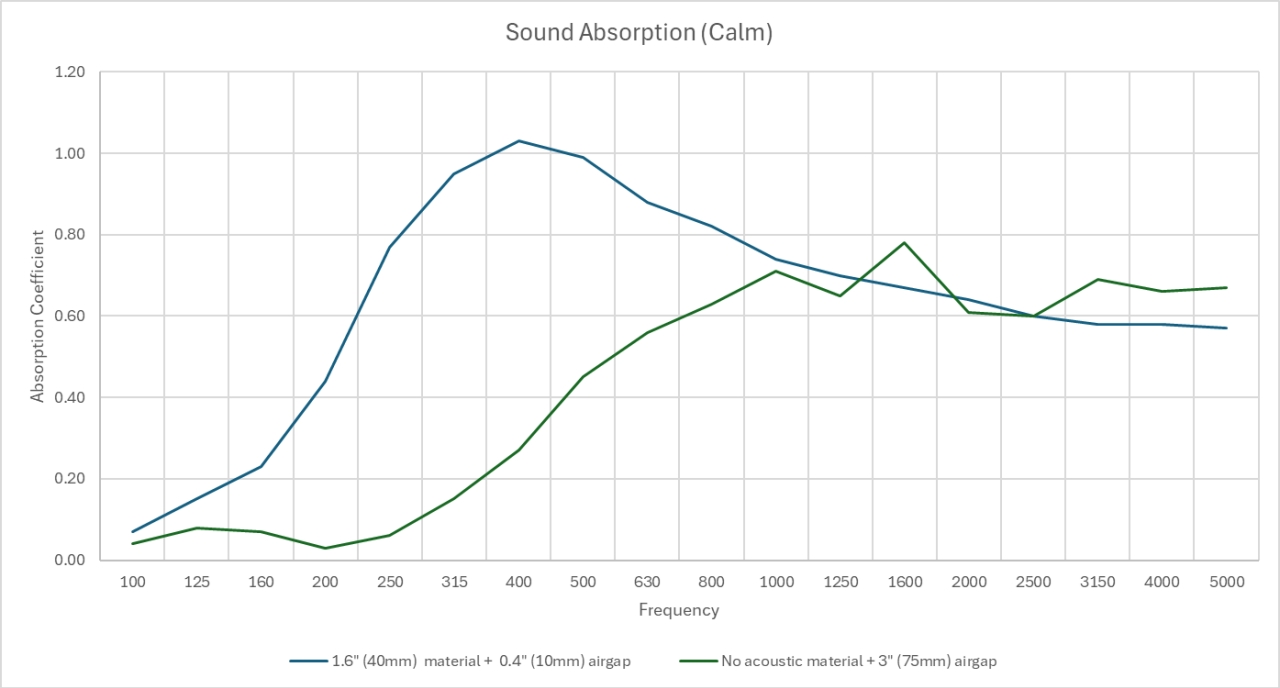

Test Configuration	NRC
1.6" polyester acoustic absorbing material with 0.4" air gap between textile and absorber	0.80
No absorbing material. Textile mounted 3" from wood backing (airgap = 3")	0.45

Calm




Color	White or Printed
Material	100% Knitted Polyester (Recyclable)
Widths (inches)	126 & 199
NRC Rating	0.80
Fire Rating	ASTM E84 Class A
Printing Options	UV or Dyesub
Cutting Methods	Cold, Ultrasonic

Order Code: FCBC-CLM-xxx (xxx = width)

FABRICoustic by COOLEDGE™

Sound Absorbing Properties: 495D Retrofit*

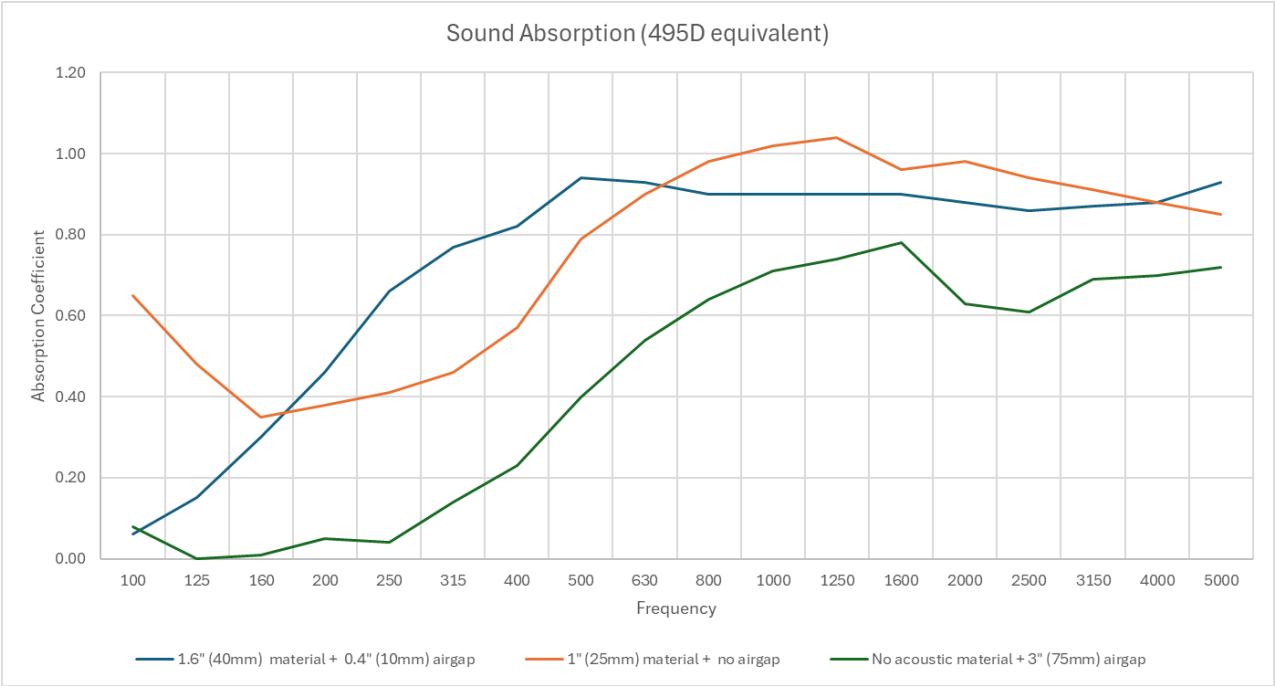

Test Configuration	NRC
1.6" polyester acoustic absorbing material with 0.4" air gap between textile and absorber	0.85
1" polyester acoustic absorbing material mounted on drywall+ plywood backer with no air gap between textile and absorber	0.80
No absorbing material. Textile mounted 3" from wood backing (airgap = 3")	0.45

*Acoustic data based on test reports for equivalent textile

495D Retrofit



Color	White
Material	100% Knitted Polyester - coated (Recyclable)
Widths (inches)	126 & 199
NRC Rating	0.85 (preliminary)
Fire Rating	ASTM E84 Class A
Cutting Methods	Cold

Order Code

FCBC-RTR-xxx (xxx = width)